



## Hospitality Program / G4

### Brand Approved

Designed for hospitality, G4 reflects vibrant energy, each pattern integrates dynamic movement and angular elements, neutral tones and accent colours create a warm and inviting space.





**NTX124 Corridor**



**NTX123 Guestroom**



**NA46 Rubber Wall Base  
Guestroom/Corridor**





**Luxury Vinyl Plank  
Dario/ Foxridge**



Construction:	Infinity Tip Shear
Yarn Content:	Nortron Nylon
Dye Method:	Solution Dyed
Gauge:	1/10th
Width:	12'
Yarn Weight Tufted:	32oz
Stitch Rate:	12 SPI
Primary Backing:	Woven Polypropylene
Secondary Backing:	Action Bac
Pile Height:	.250"
Total Thickness:	.375"
Pattern Repeat:	90" x 36"
Flame Resistance:	Passes DOC FF-1-70
Static Control:	Less than 3.5 KV
Flooring Radiant Panel:	Class 1 (ASTM 648)
Smoke Density:	Less than .450 (ASTM E622)
Soil Resistance:	Commercial Anti-Soil Protection
Stain Resistance:	Stain Protection
Warranties Wear:	10 Year Limited

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104. Carpet must be over manufacturer's recommended pad.

Style#: NTX123 Broadloom Guest Room  
/ Minimum order 1200 Yds

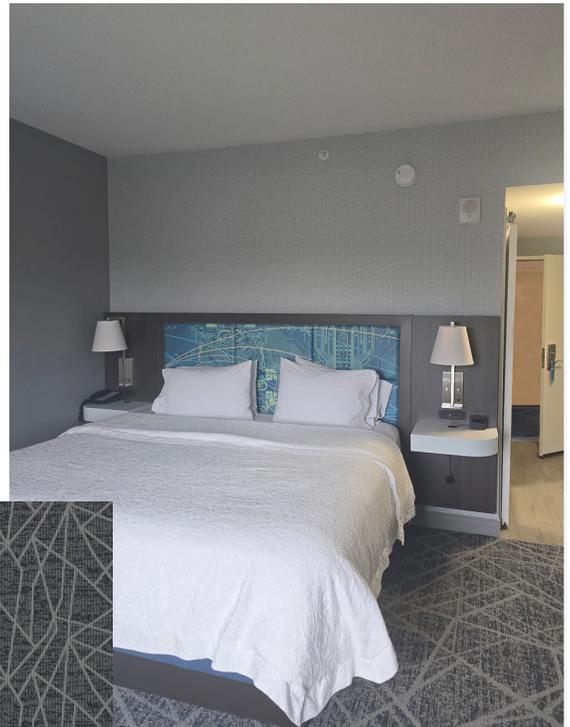



**Construction:** Patterned Cut Pile  
**Yarn Content:** Type 6 Nylon  
**Dye Method:** Solution Dyed  
**Gauge:** 1/10th  
**Width:** 12'  
**Yarn Weight Tufted:** 36oz  
**Stitch Rate:** 13 SPI  
**Primary Backing:** Woven Polypropylene  
**Secondary Backing:** Woven Polypropylene  
**Pile Height:** .25  
**Total Thickness:** .375 Approx "  
**Pattern Repeat:** 72" x 108"

**Flame Resistance:** Passes DOC FF-1-70  
**Static Control:** Less than 3.5 KV  
**Flooring Radiant Panel:** Class 1 (ASTM 648)  
**Smoke Density:** Less than .450 (ASTM E622)  
**Soil Resistance:** Commercial Anti-Soil Protection  
**Stain Resistance:** Stain Protection  
**Warranties Wear:** 10 Year Limited

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104. Carpet must be over manufacturer's recommended pad.

All Specifications subject to normal manufacturing tolerance.

Style#: NTX124 Broadloom Corridor



NTX-P1 Corridor Option

**Construction:** Infinity Tip Shear  
**Yarn Content:** 100% Nylon  
**Dye Method:** Solution Dyed  
**Gauge:** 1/10th  
**Width:** 12'  
**Yarn Weight Tufted:** 36oz  
**Stitch Rate:** 13.5 SPI  
**Primary Backing:** Woven Polypropylene  
**Secondary Backing:** Woven Polypropylene  
**Pile Height:** .280"  
**Total Thickness:** .450"  
**Pattern Repeat:** N/A

**Flame Resistance:** Passes DOC FF-1-70  
**Static Control:** Less than 3.5 KV  
**Flooring Radiant Panel:** Class 1 (ASTM 648)  
**Smoke Density:** Less than .450 (ASTM E622)  
**Soil Resistance:** Commercial Anti-Soil Protection  
**Stain Resistance:** Stain Protection  
**Warranties Wear:** 10 Year Limited

Carpet should be installed in accordance with the Carpet and Rug Institute's standard CRI-104. Carpet must be over manufacturer's recommended pad.





## PRODUCT SPECIFICATIONS

**PLANK SIZE:** 7" x 48" Inches

**CORE:** SPC

**TOTAL THICKNESS:** 5.5mm w/1.5mm EVA high density pad

**WEAR LAYER:** 20mil

**PACKAGING:** 10 PCS/BOX, 23.64 SQFT/BOX, 65 BOXES/PALLET, 1536.6 SQFT/PALLET  
16 PALLETS/ TRUCKLOAD 24,585.6 SQFT

**WEIGHTS:** 40.47 Lbs Per Carton / 2631 Lbs per Pallet

**INSTALLATION:** Click System

**WARRANTY: RESIDENTIAL:** 30 Year Limited

**LIGHT COMMERCIAL:** 10 Year Limited



Style: Dario  
Luxury Vinyl Plank



COLOR: Foxridge