






Style: **MRk-133 IN**  
Repeat: **72x72** ( shown as Carpet Tile: 24x24-qtr )  
Color: **AGED BRONZE**




YARN COLORS

- A  6025
- B  6179
- C  6060



Style: **MRk-133 IN**  
Repeat: **72x72** ( shown as Carpet Tile: 24x24-qtr )  
Color: **AGED BRONZE**

YARN COLORS

- A  6025
- B  6179
- C  6060

# Colorways



DENIM (NO  
MINIMUM)



ADOBE (250 SY  
MINIMUM)



AGED BRONZE (NO  
MINIMUM)




FLANNEL (250 SY  
MINIMUM)



GRAFFITI (250 SY  
MINIMUM)



HENNA (250 SY  
MINIMUM)




LUCID (250 SY  
MINIMUM)



MARITIME (250 SY  
MINIMUM)







PRESSED FLINT (250  
SY MINIMUM)



TUNDRA (250 SY  
MINIMUM)

# INSTALLATION METHODS

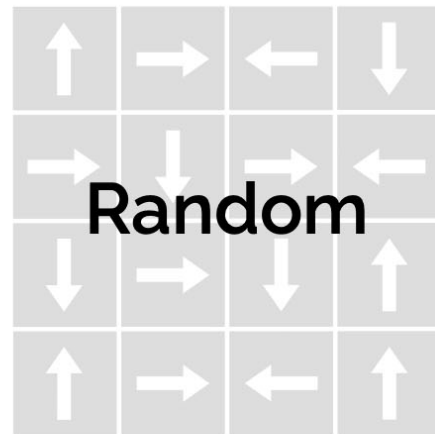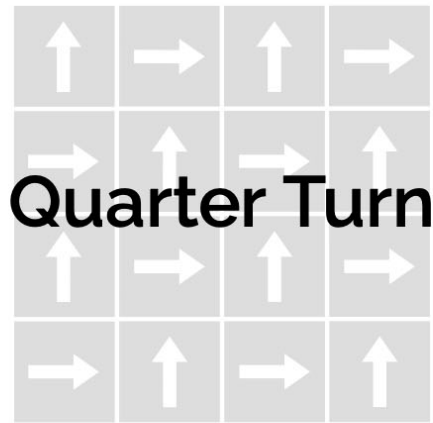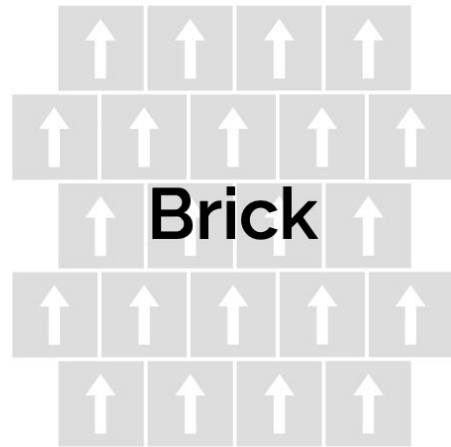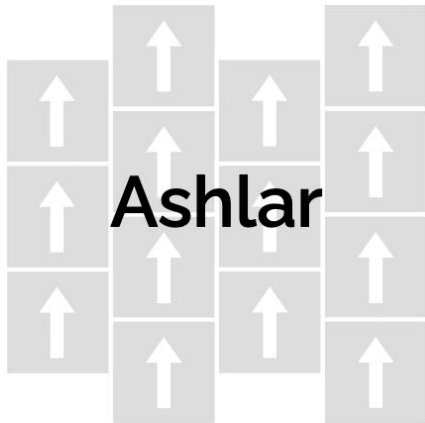

# TECHNICAL SPECS

carpet tile

---

Construction:	Infinity
Yarn Content:	100% Nylon
Dye Method:	Solution Dyed
Gauge:	1/10th
Yarn Weight Tufted:	24 oz
Stitch Rate:	10 SPI
Secondary Backing:	MOD-FLEX (standard)   MOD-AIRE (available as upgrade)
Pile Height:	.315"
Total Thickness:	.375"
Pattern Repeat:	NA
Tile Size:	24" X 24"

(18" X 36" | 12" X 48" Planks available upon request; minimums apply)

## Performance

---

Flame Resistance:	Passes DOC FF-1-70
Static Control:	Less than 3.5 KV
Flooring Radiant Panel:	Class 1 (ASTM 648)
Smoke Density:	Less than .450 (ASTM E-622)
Soil Resistance:	Commercial Anti-Soil Protection

## Warranties

---

Wear:	10 Year
Static:	Lifetime
Stain:	Lifetime
Colorfastness:	Lifetime